



Item no: 0108794

Suction cup BX75P Polyurethane 30/60 with filter, 3/8" NPSF female

Suitable for uneven and porous surfaces such as cardboard, etc. DURAFLEX® suction cups are manufactured in a specially developed material that features the elasticity of rubber and wear resistance of polyurethane. The material of the DURAFLEX® is mark-free.

- Suitable for level adjustment and for uneven and porous surfaces such as cardboard, etc.
- In the two-coloured suction cup the bellows and the sealing lip are of different hardnesses, which makes the suction cup strong and stable and, at the same time, soft and flexible.
- DURAFLEX® suction cups manufactured in a specially developed material that features the elasticity of rubber and wear resistance of polyurethane.
- The material DURAFLEX® is mark free.

General

 ${\bf Application} \qquad \qquad {\bf Corrugated Cardboard, Mark Free, Plastic Injection Molded Parts,}$

DrySheetMetal

Suction cup shape Multibellows Material PU30, PU60

 $\begin{array}{lll} \text{Suction cup model} & \text{BX-P} \\ \text{Weight} & \text{71 g} \\ \text{Volume} & \text{80 cm}^{\text{3}} \\ \end{array}$

Suction cup model BX75P PU30 PU60

Movement, vertical max. 26 mm Curve radius, min. 23 mm

Fitting

Fitting option None
Fitting size 3/8"
Fitting style Female
Fitting type NPSF-thread

Dimension

Height 64.7 mm Outer diameter 77.5 mm

Performance - lifting forces


BX75	P PU30 PU60	Â	∆
20 -kPa		62 N	39 N
60 -kPa		110 N	83 N
90 -kPa		141 N	116 N

Material

Name	PU30	PU60
Colour	Yellow	GreenTransparent
Temperature	10 - 50 °C	10 - 50 °C
Hardness	30 °Shore A	60 °Shore A

	PU30	PU60
Alcohol	n/a	n/a
Concentrated acids	+	+
Ethanol	+	+
Hydrolysis	+	+
Methanol	-	-
Oil	+++	+++
Oxidation	-	-
Petrol	+	+
Wear resistance	+++	+++
Weather and ozone	+++	+++

Dimensional drawings \triangle

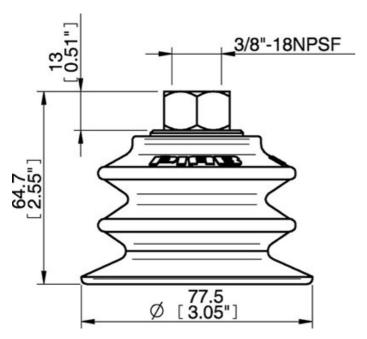

Values specified in the data sheet are tested at:

- Room temperature: (20°C [68°F] ± 3°C [5.5°F])
- Standard atmosphere: (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg])
- Relative humidity: 0-100%
- Compressed air quality: DIN ISO 8573-1 class 4

Accessories

0106797 | Thread insert G3/8" male, with O-ring
0200716 | Thread insert G1/8" male, with O-ring and mesh filter
0201077 | Thread insert G1/4" male, with O-ring and mesh filter
0107150 | Suction cup BX75P Polyurethane 60 with filter, for thread insert

Spare parts

0107145 Suction cup BX75P Polyurethane 30/60 with filter, for thread insert 0201003 Suction cup filter BX75P, 10 pcs