


Suction cup F50-2 Silicone FCM, 0200438

- The silicone material complies with FDA 21 CFR 177.2600 & EU 1935/2004.
- Suitable for flat objects.
- Good stability and little inherent movement.
- Recommended when the lifting force is parallel to the surface of the object.
- Cleats prevent thin, sensitive objects from being deformed and gives extra friction when the lifting force is parallel.

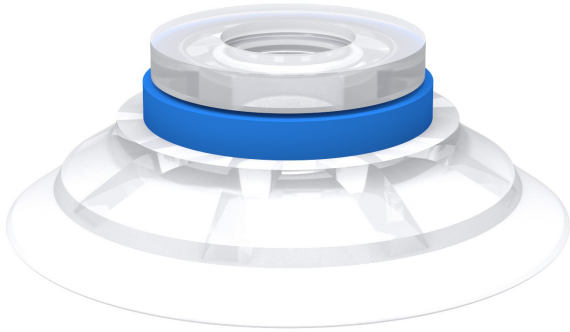

General

Curve radius	55 mm
Movement, vertical max.	2.2 mm
Application	Food contact materials (FDA & EU), non-detectable
Material	Silicone (SIL FDA)
Suction cup model	F
Suction cup shape	Flat
Volume	10 cm ³
Weight	14 g

Fitting

Fitting size	None
Fitting style	None
Fitting type	None
Fitting option	None

Dimension

Height	17.5 mm
Outer diameter	53 mm
Outer diameter, actuated	54.6 mm

Performance — lifting forces

		
20 -kPa	36 N	24 N
60 -kPa	74 N	40 N
90 -kPa	96 N	50 N


Material

	Silicone (SIL FDA)
Colour	Transparent
Hardness	50 °Shore A
Temperature	-40 – 200 °C

Material resistance

	Silicone (SIL FDA)
Alcohol	++
Concentrated acids	-
Ethanol	N/A
Hydrolysis	+
Methanol	N/A
Oil	-
Oxidation	+++
Petrol	-
Wear resistance	++
Weather and ozone	+++

Dimensional drawings



Values specified in the data sheet are tested at:

Room temperature	(20°C [68°F] ± 3°C [5.5°F])
Standard atmosphere	(101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg])
Relative humidity	0-100%
Compressed air quality	DIN ISO 8573-1 class 4

Accessories

	Item no.
Fitting G1/4" male, 50, with mesh filter	3250092
Fitting 1/8" NPSF female, 50, with mesh filter	0101154
Fitting 1/4" NPT male, with mesh filter	3250094